
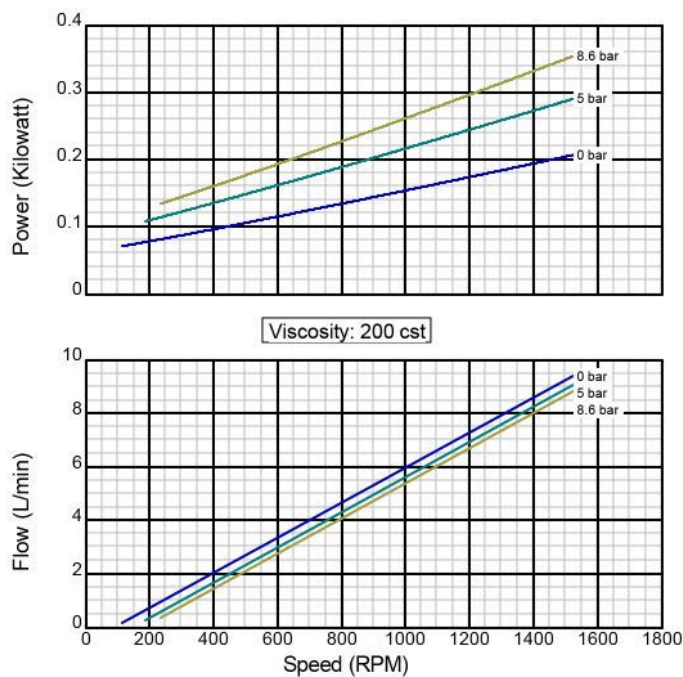
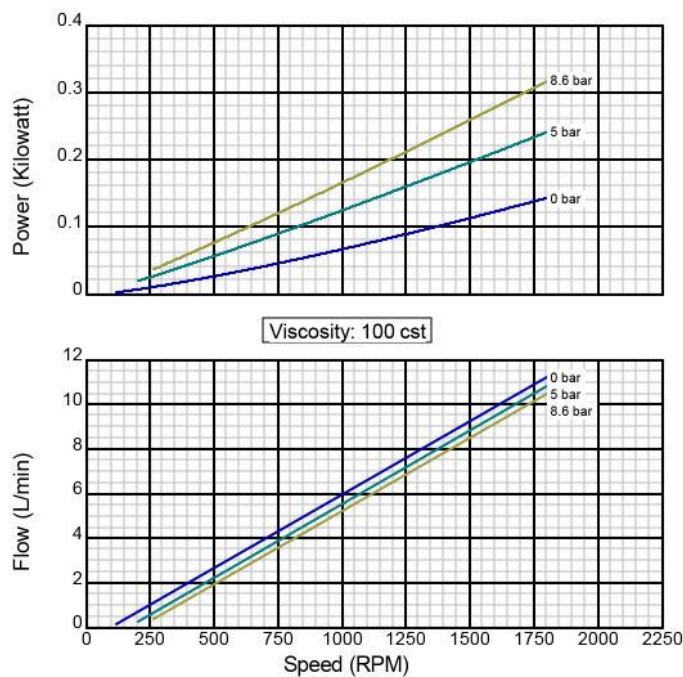
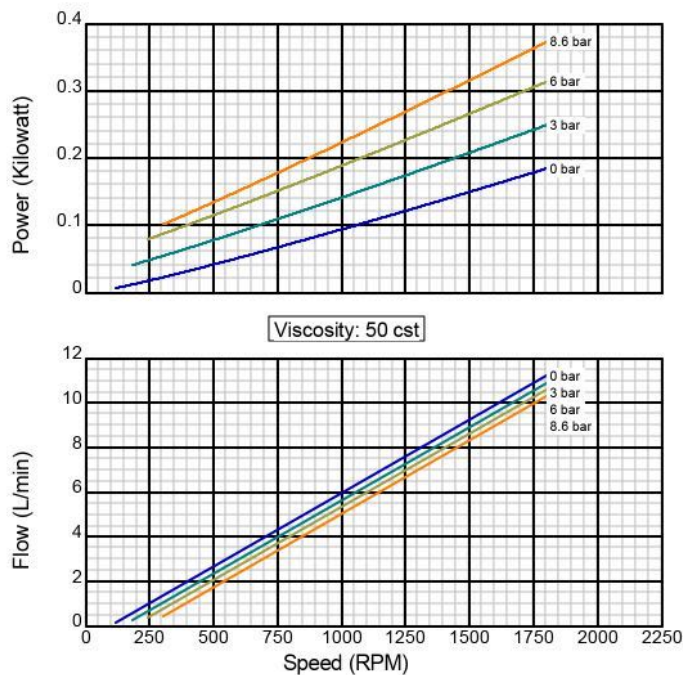


Iron Construction

Standard Clearance

9.525 mm Std. Port Size


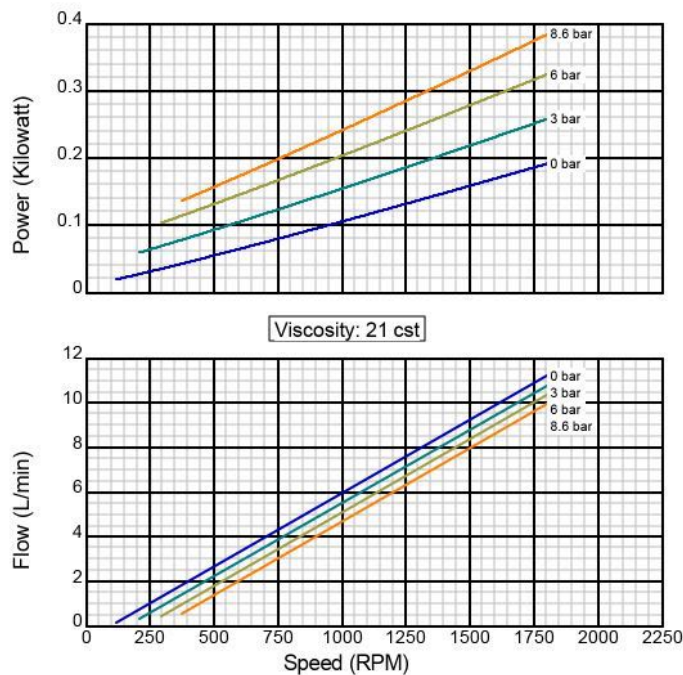


Model 1C

Iron Construction

Standard Clearance

9.525 mm Std. Port Size

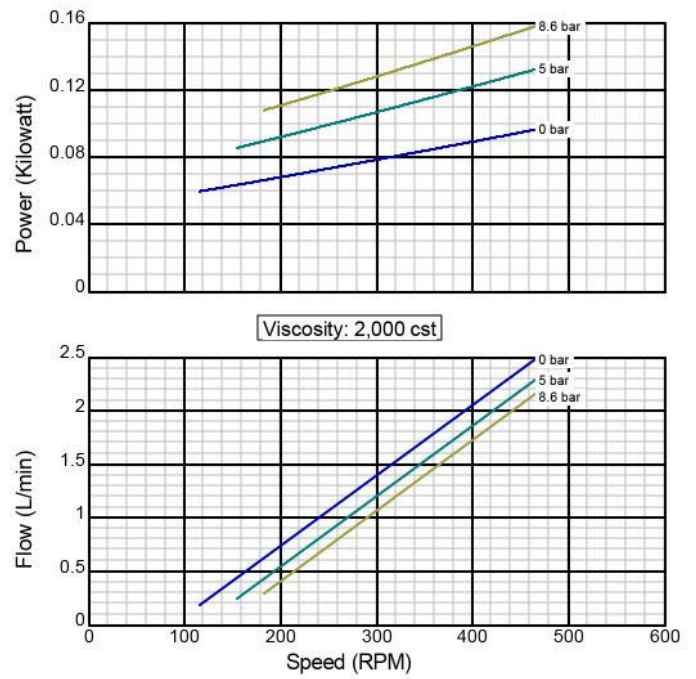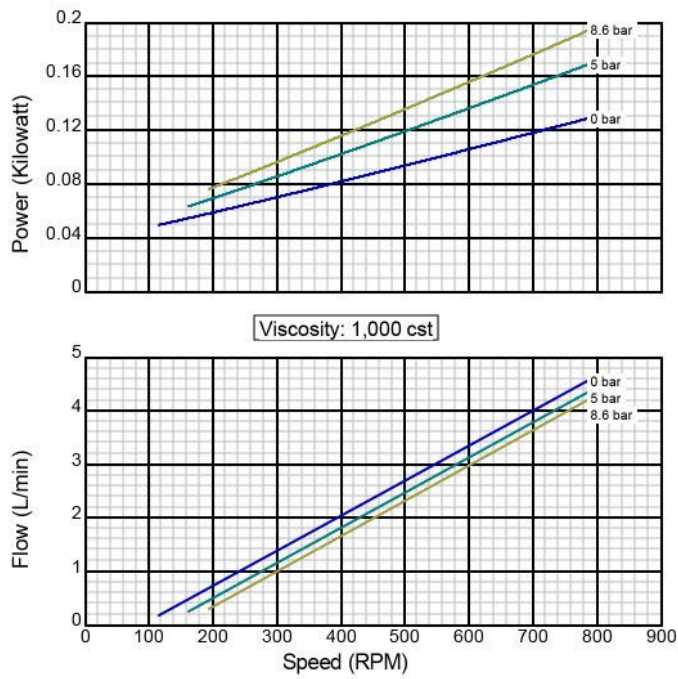

MASTER DISTRIBUIDOR

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on
November 30, 2000

Model 2C

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

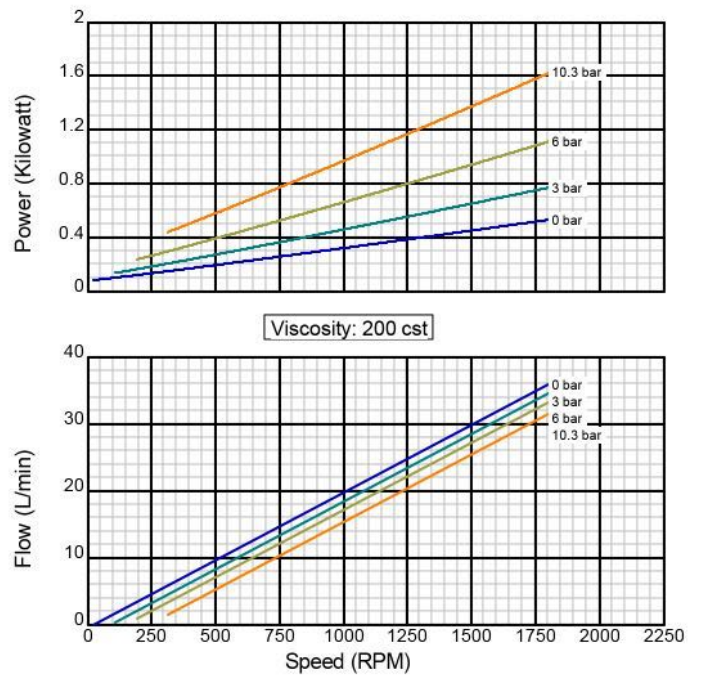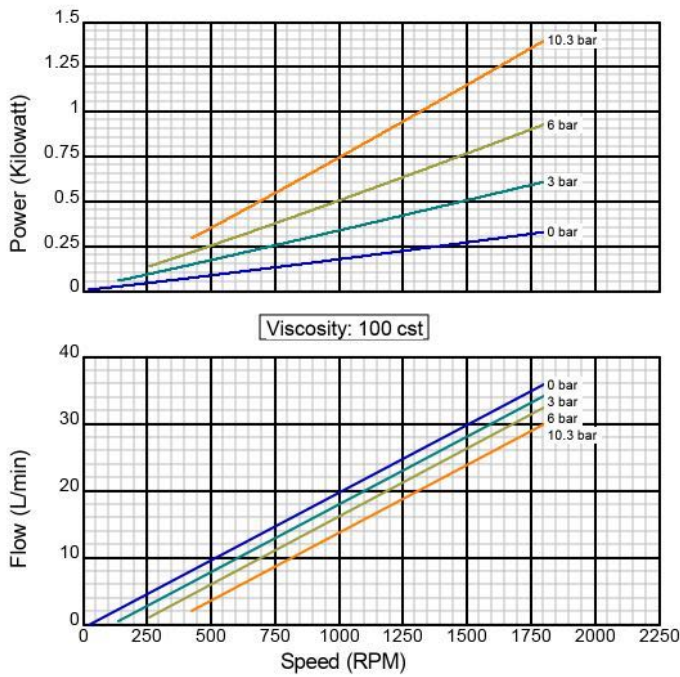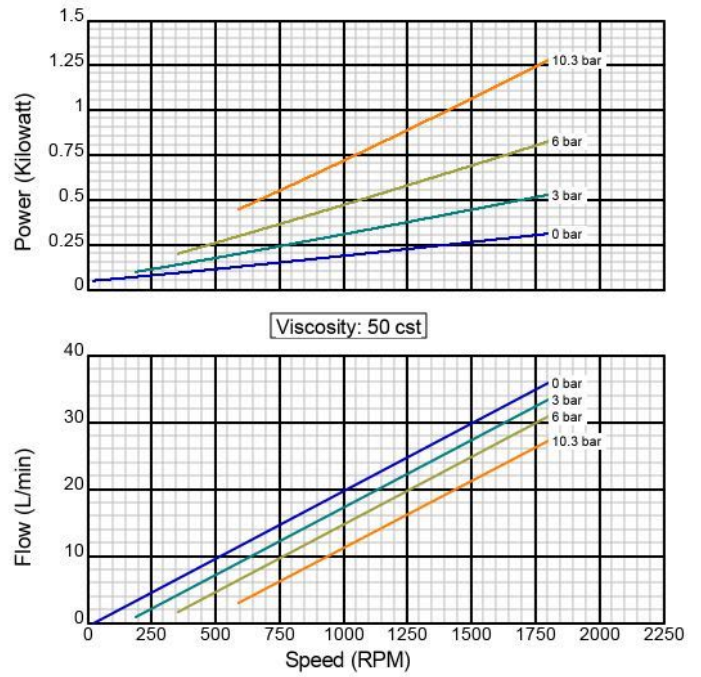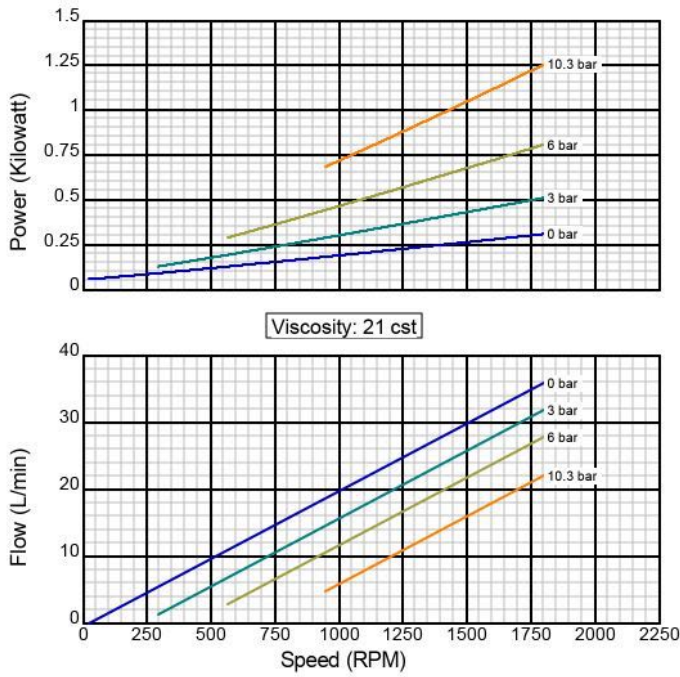

MASTER DISTRIBUIDOR

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on
November 30, 2000

Model 2C

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

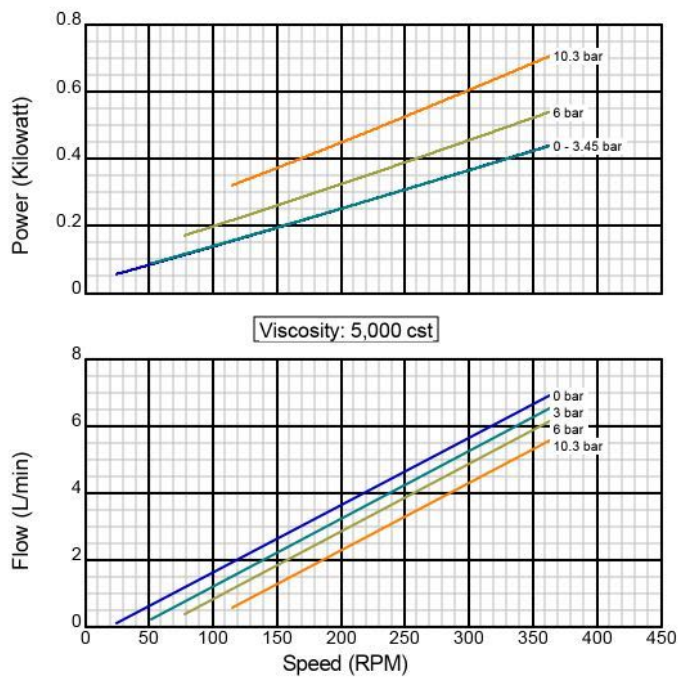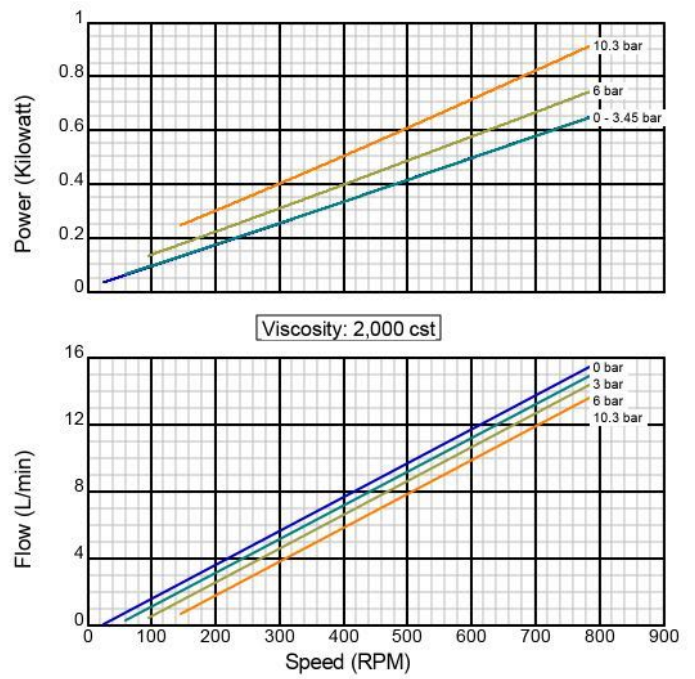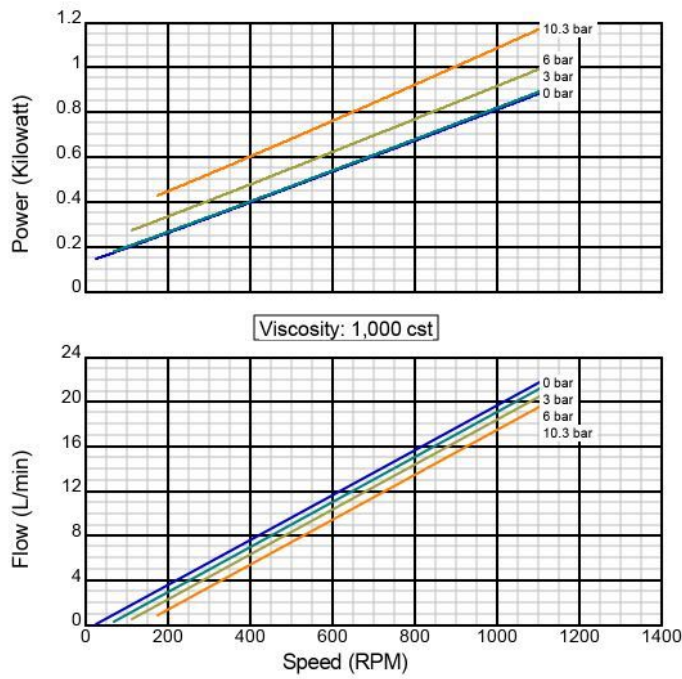

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on
November 30, 2000

Model 3C

Iron Construction

Standard Clearance

31.75 mm Std. Port Size

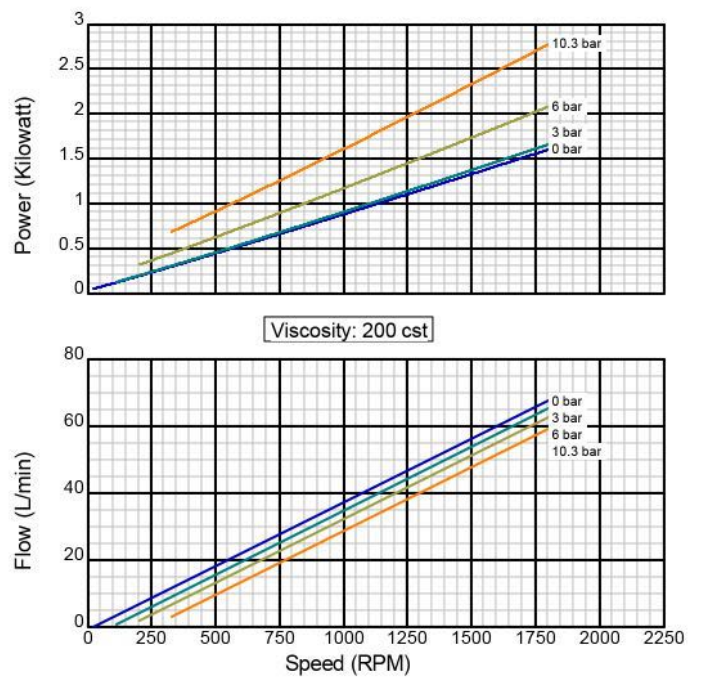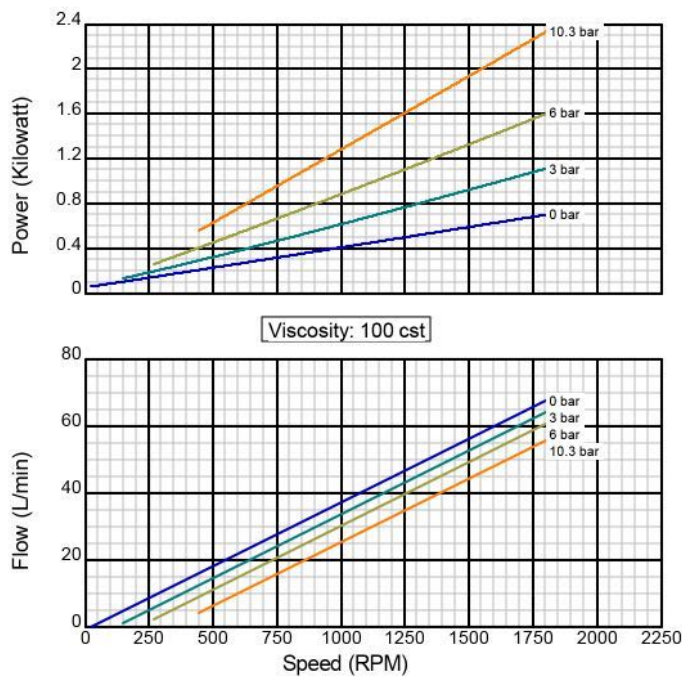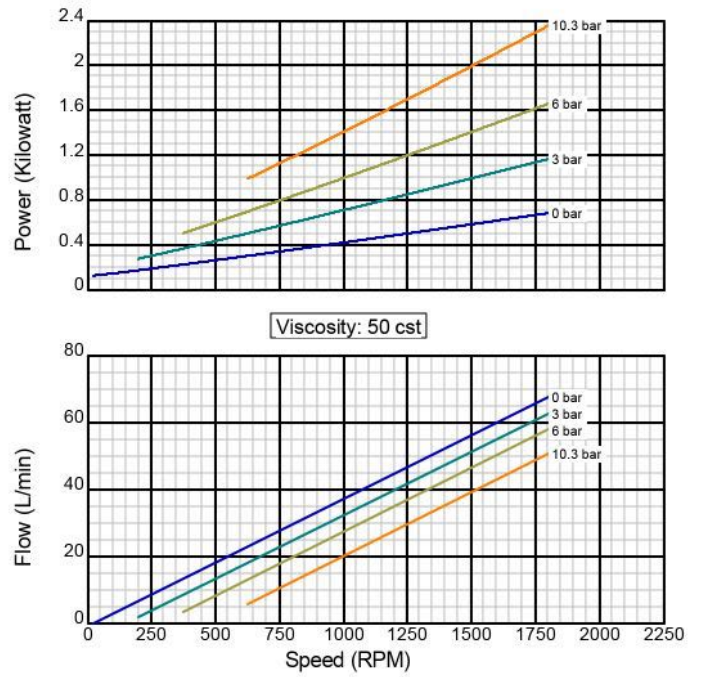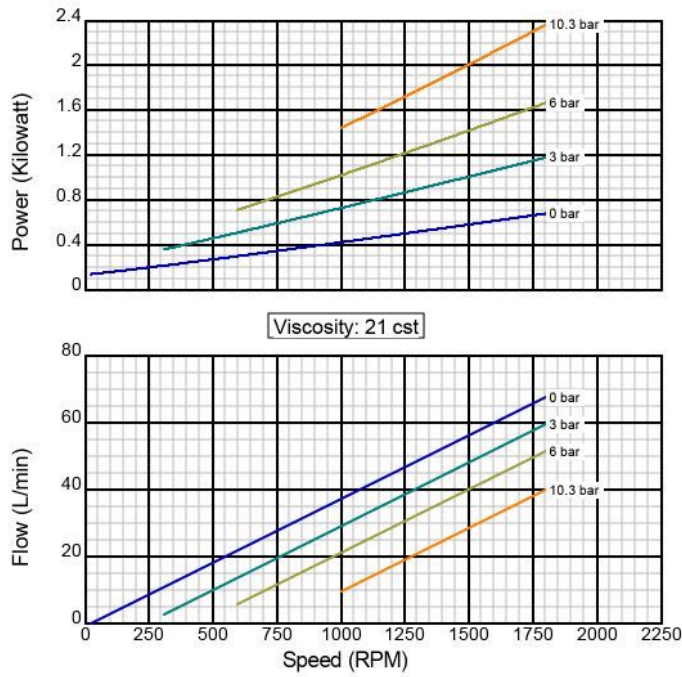

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on
November 30, 2000

Model 3C

Iron Construction

Standard Clearance

31.75 mm Std. Port Size

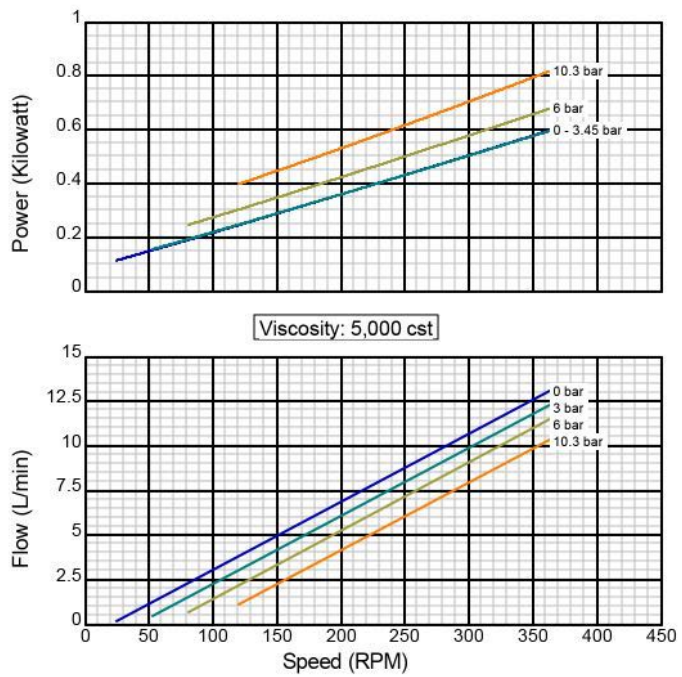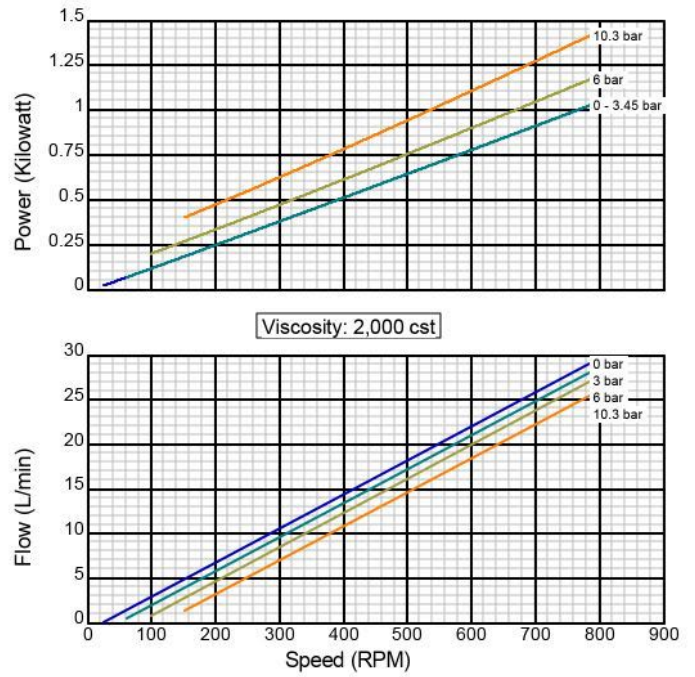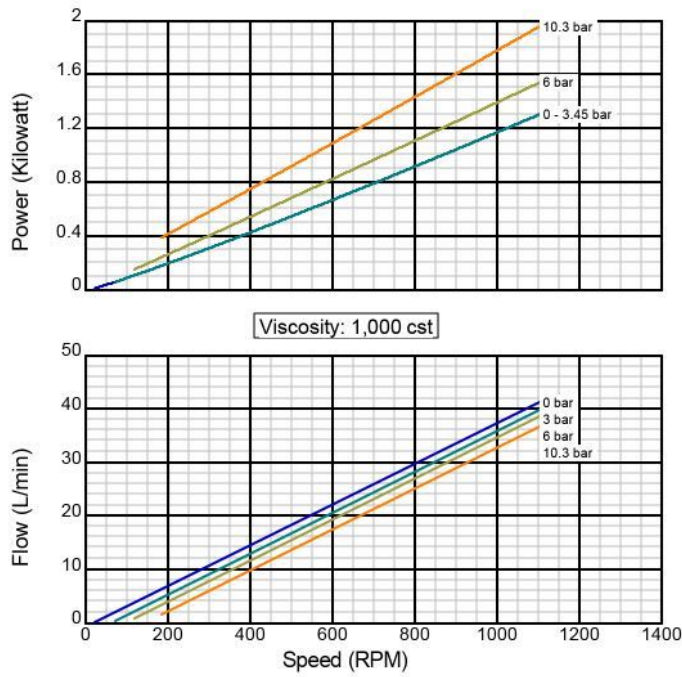

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on
November 30, 2000

Model 4C

Iron Construction

Standard Clearance

38.1 mm Std. Port Size

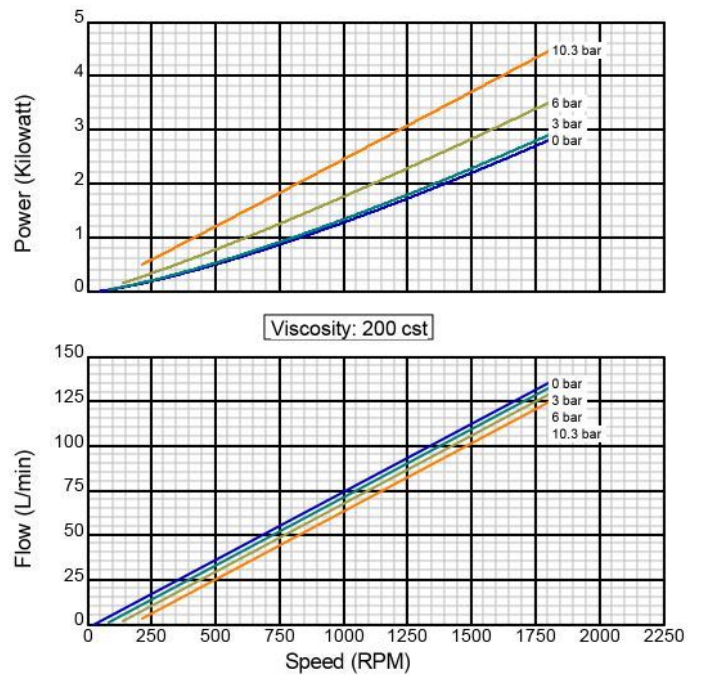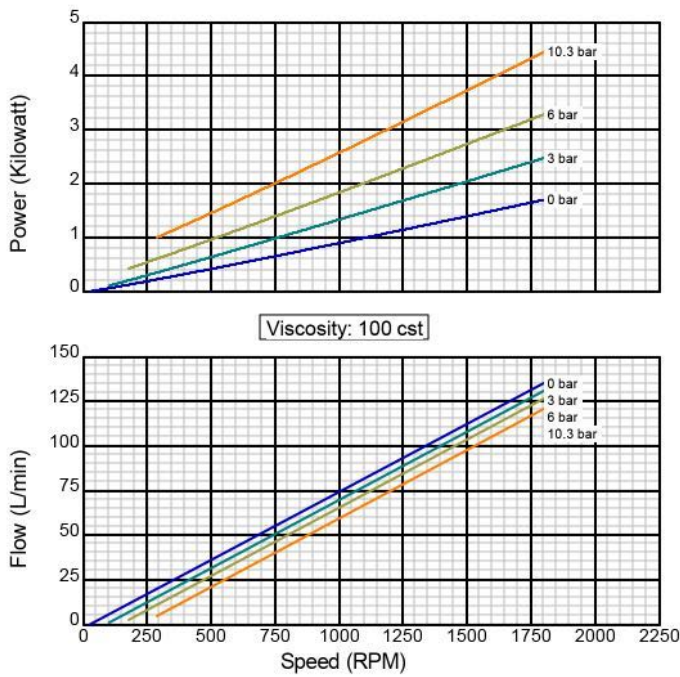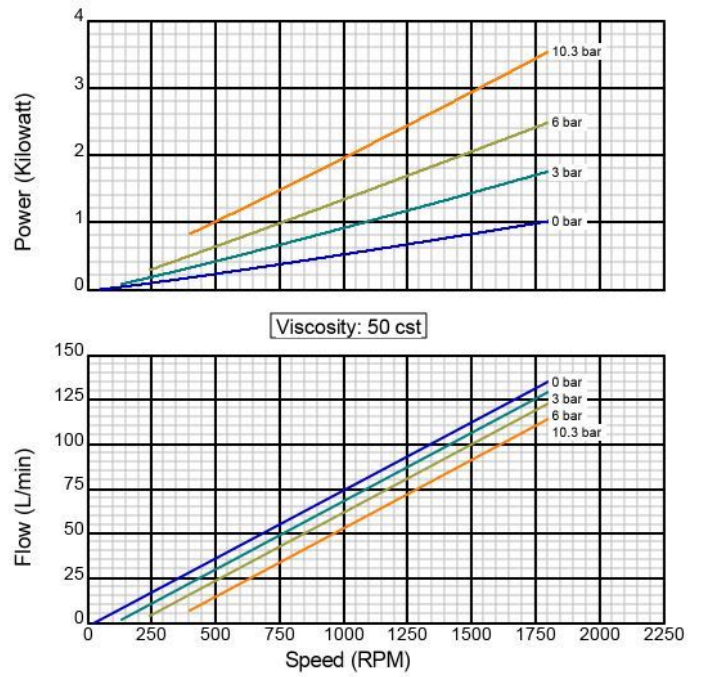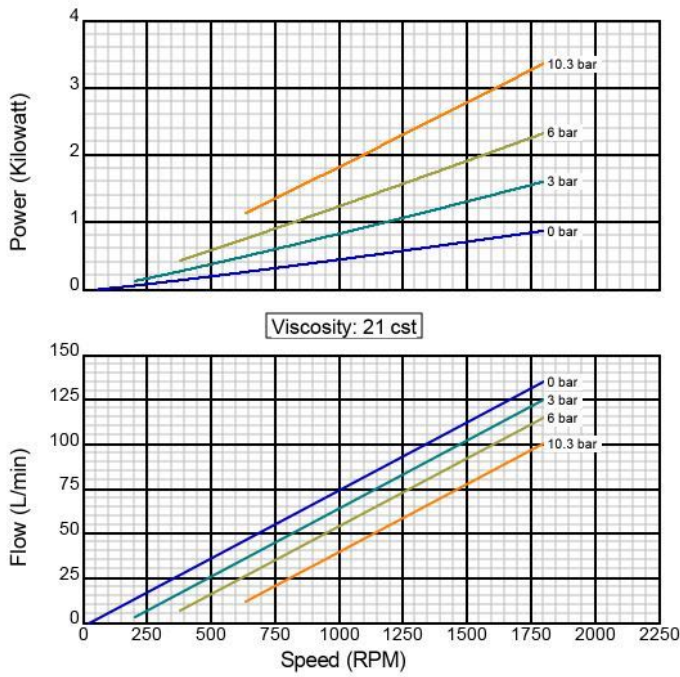

MASTER DISTRIBUIDOR

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on
November 30, 2000

Model 4C

Iron Construction

Standard Clearance

38.1 mm Std. Port Size

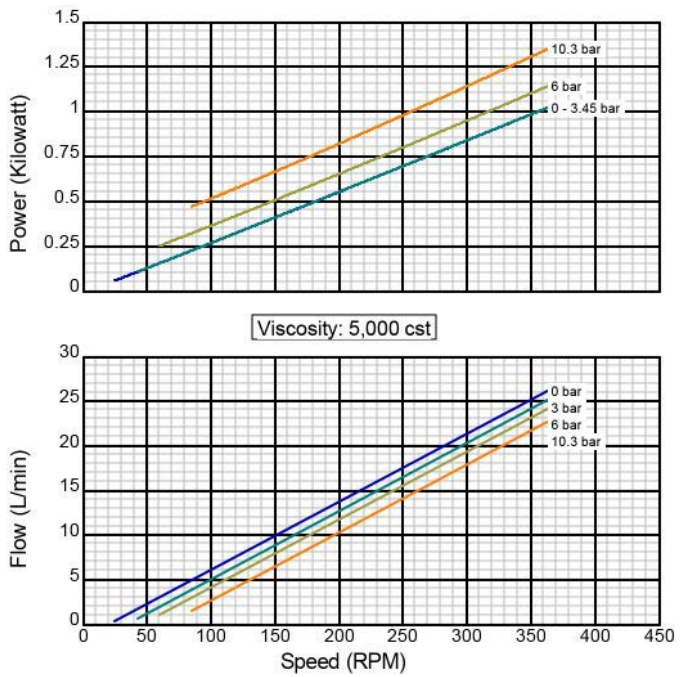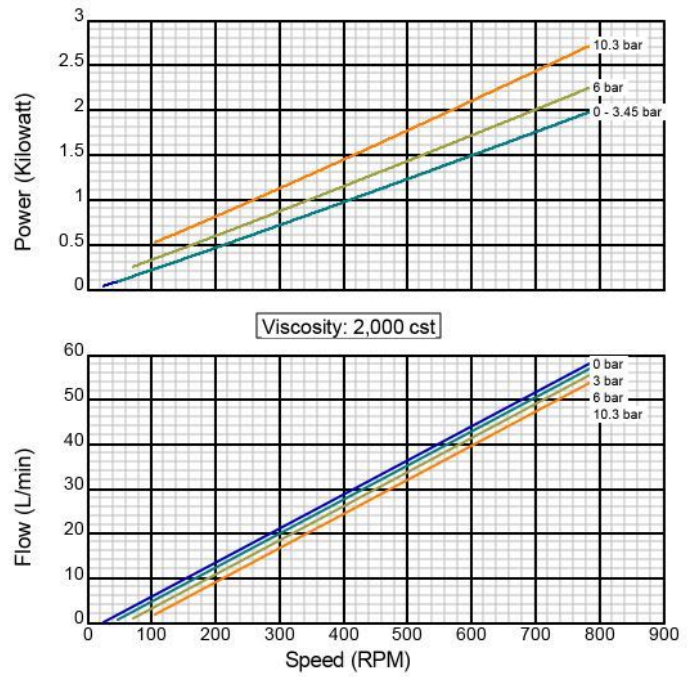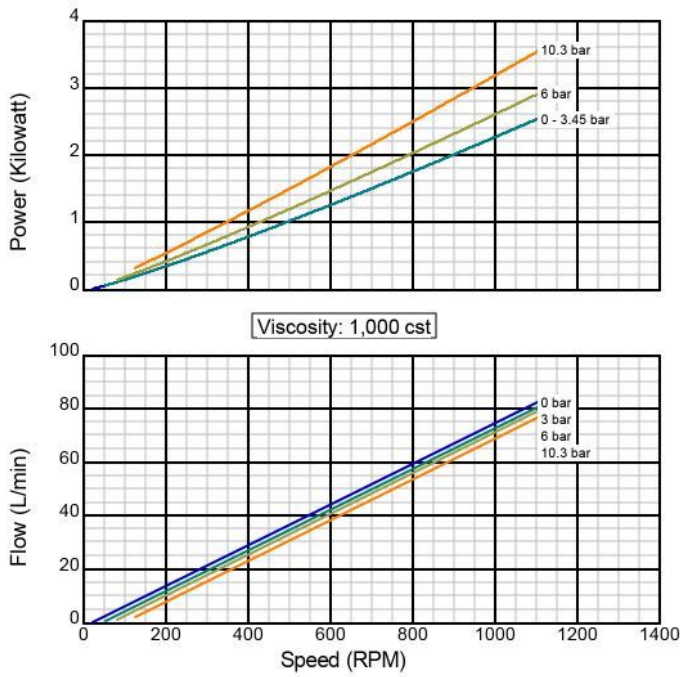

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on
November 30, 2000

Model 5C

Iron Construction

Standard Clearance

38.1 mm Std. Port Size

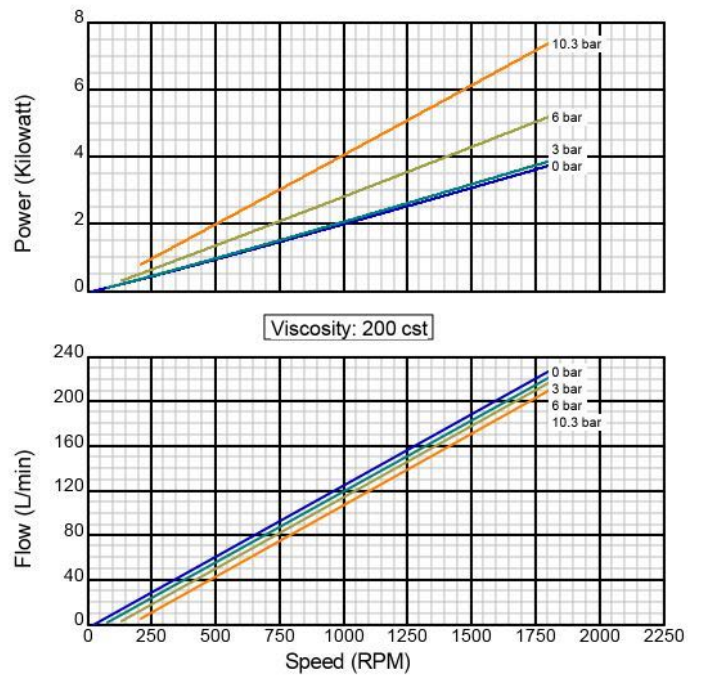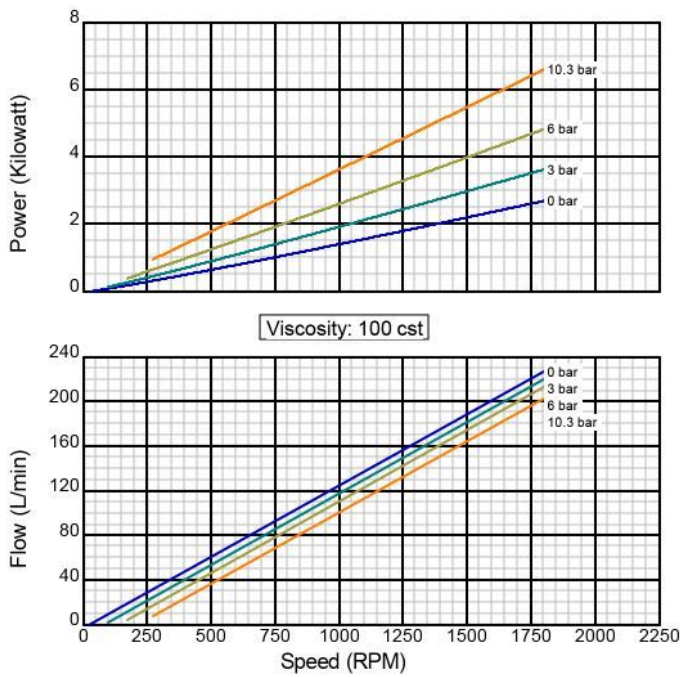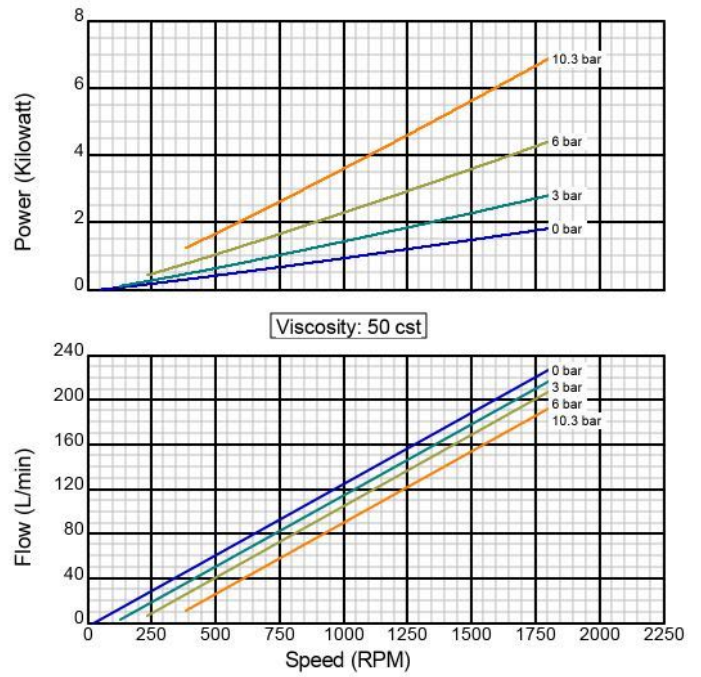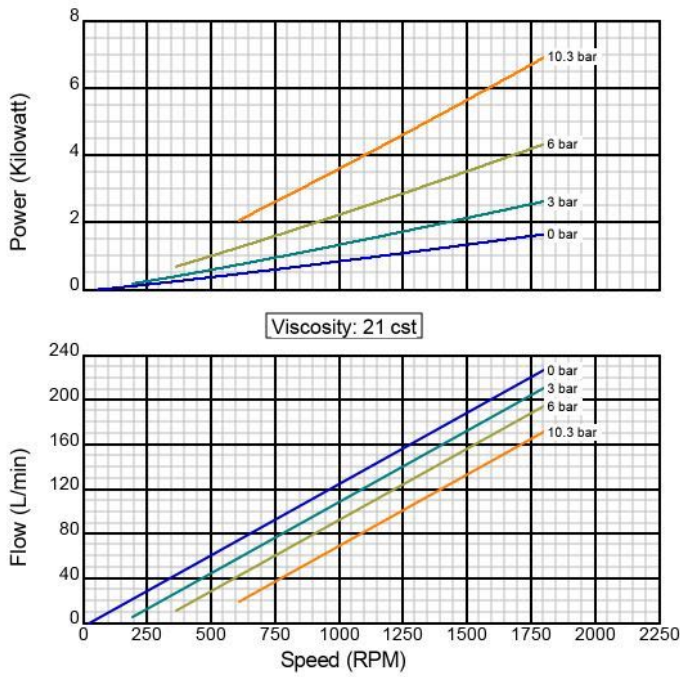

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on
November 30, 2000

Model 5C

Iron Construction

Standard Clearance

38.1 mm Std. Port Size

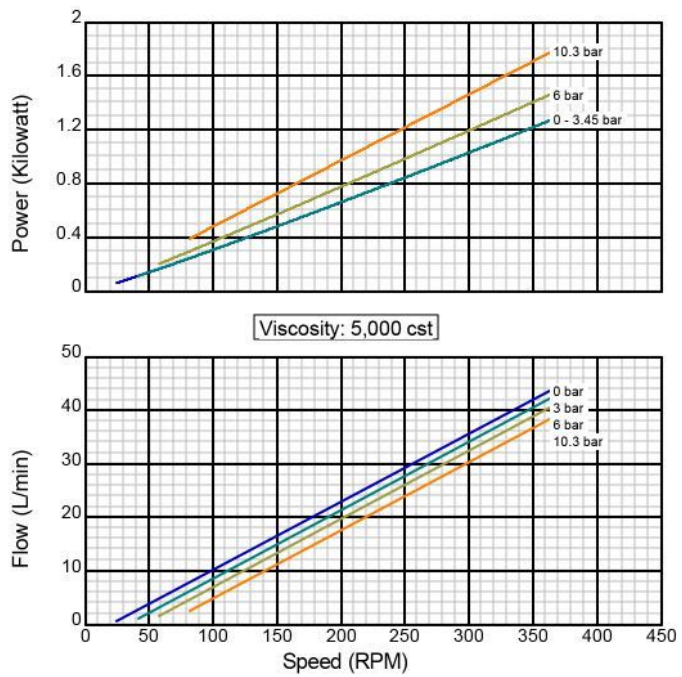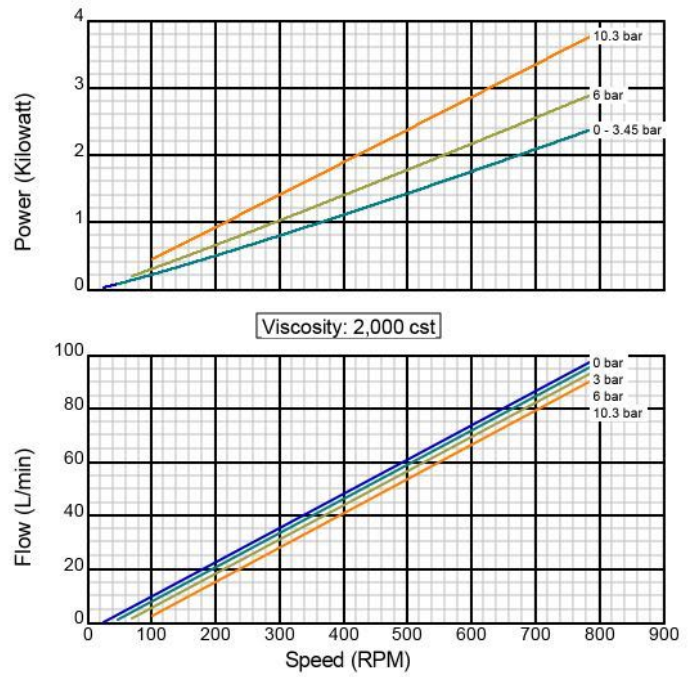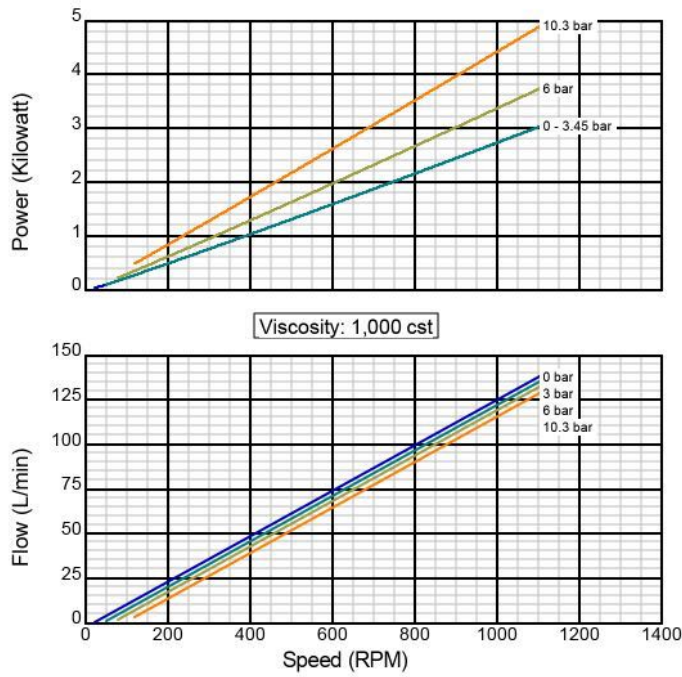

MASTER DISTRIBUIDOR

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on
November 30, 2000

Model 6C

Iron Construction

Standard Clearance

50.8 mm Std. Port Size

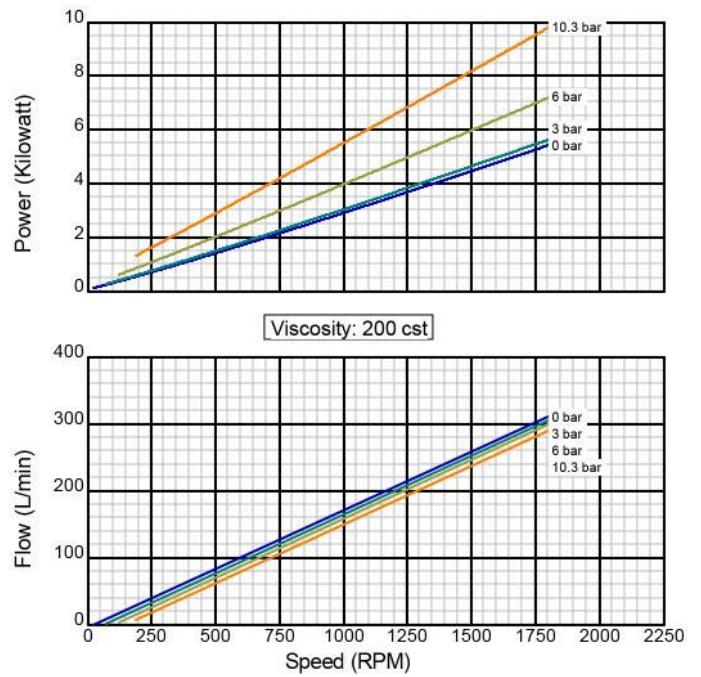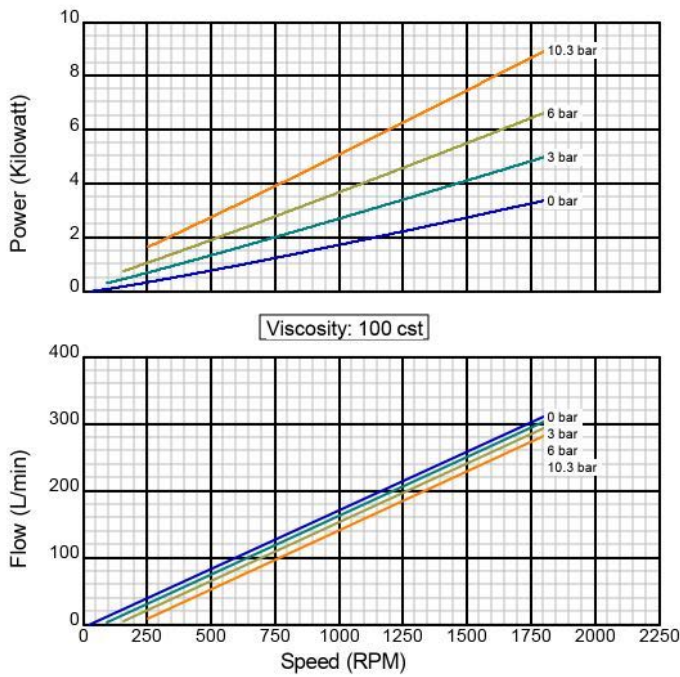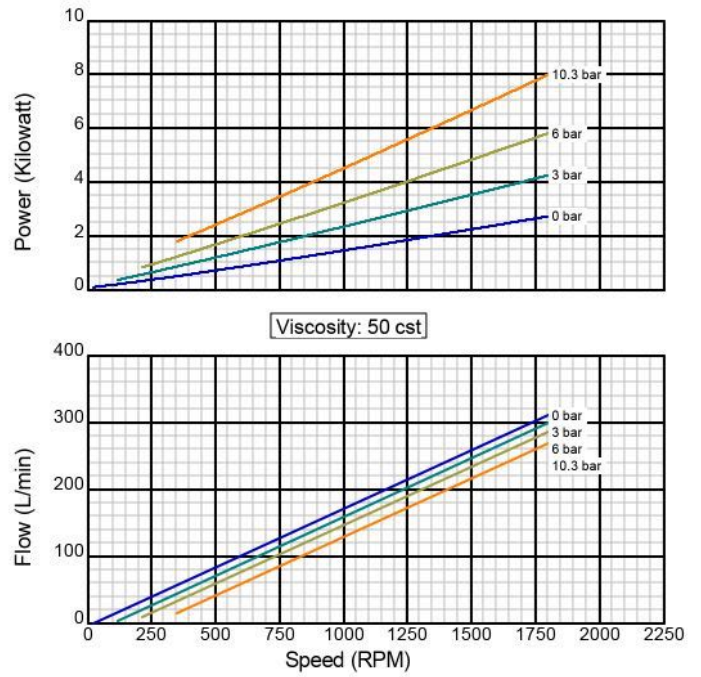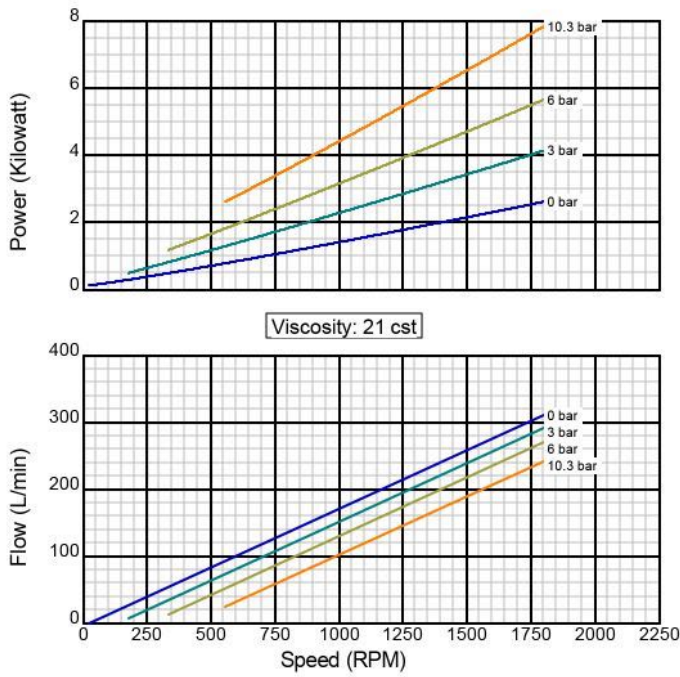

MASTER DISTRIBUIDOR

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on
November 30, 2000

Model 6C

Iron Construction

Standard Clearance

50.8 mm Std. Port Size

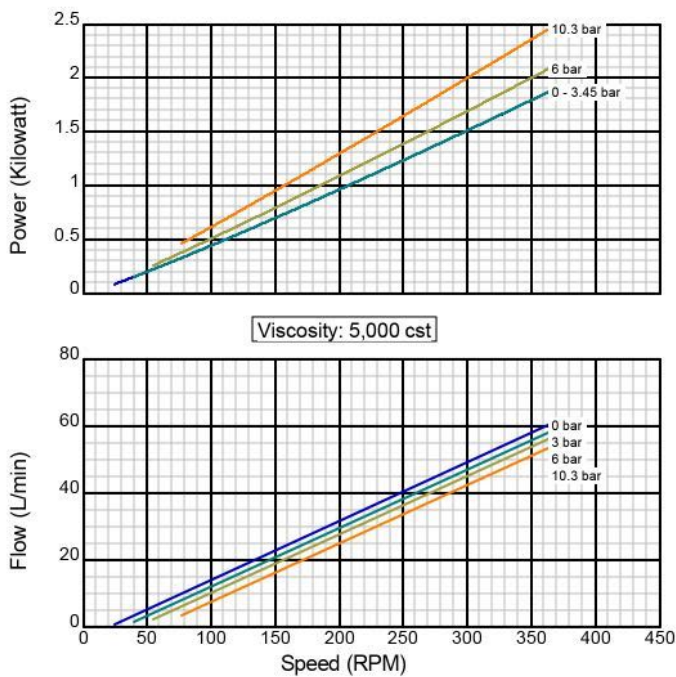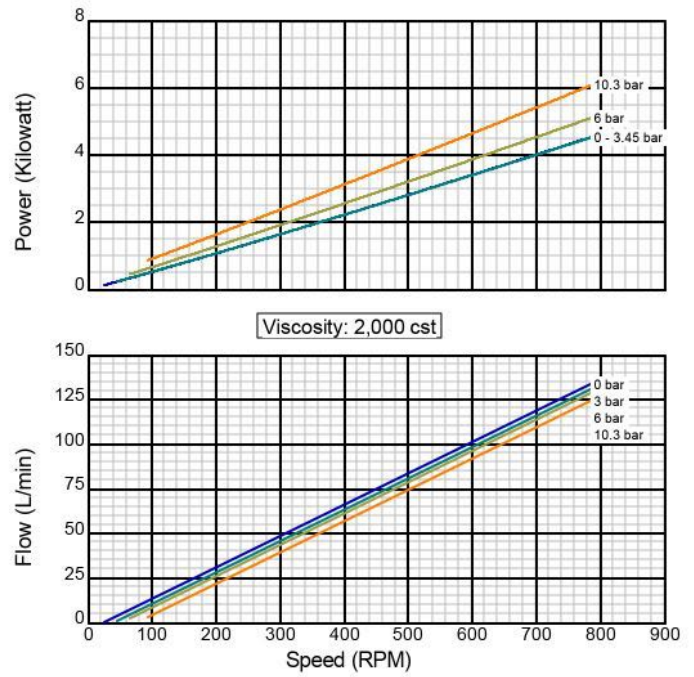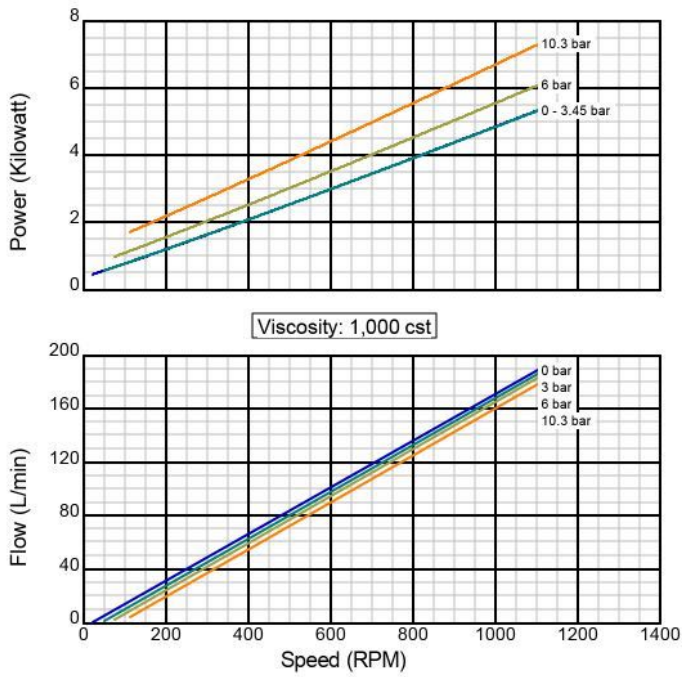

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on
November 30, 2000

Tuthill Pump Group



Excellence at work. Excellence in life.