




Performance Curves (Metric)

L Series


Iron Construction Standard Clearance 9.525 mm Std. Port Size

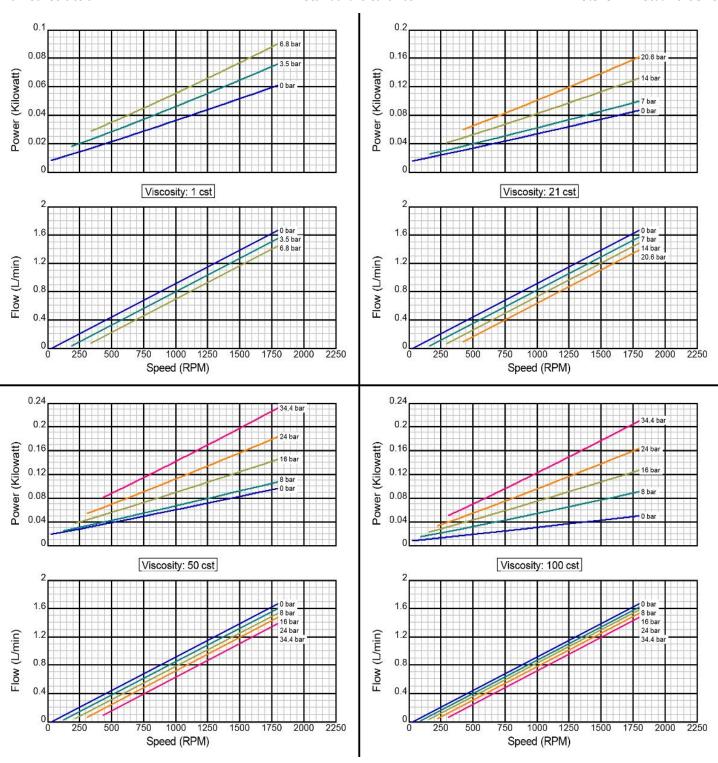

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model 30L



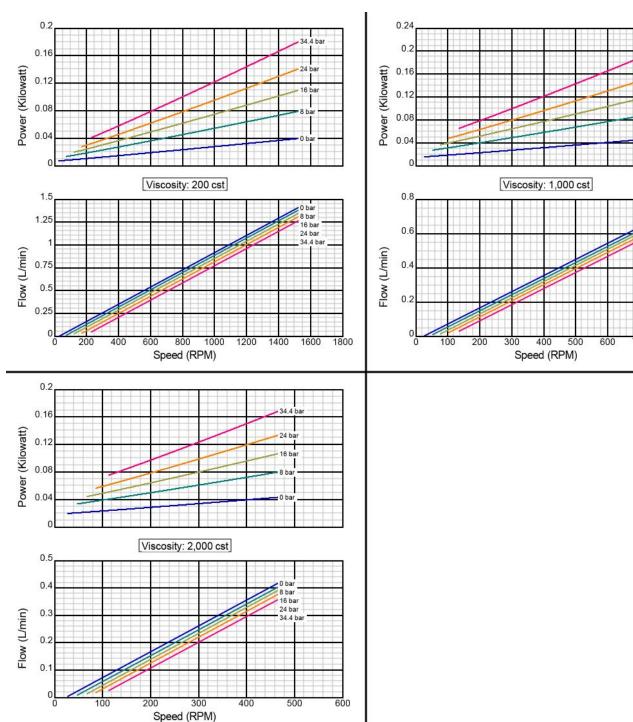




0 bar

8 bar 16 bar

24 bar 34.4 bar

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model 00L

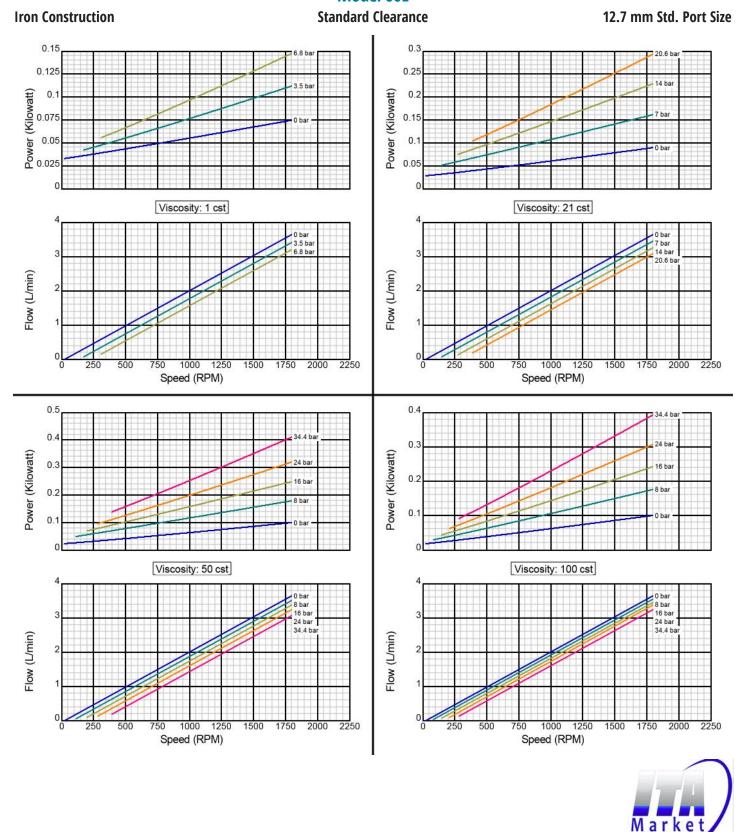


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000


MASTER DISTRIBUIDOR

Model 00L



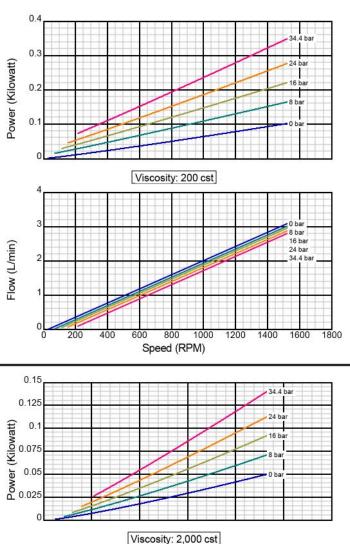

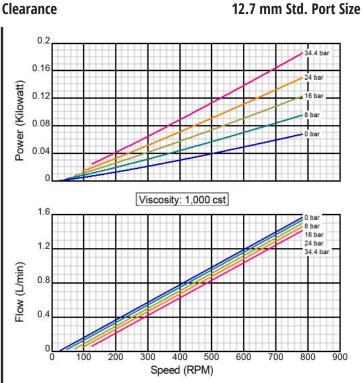


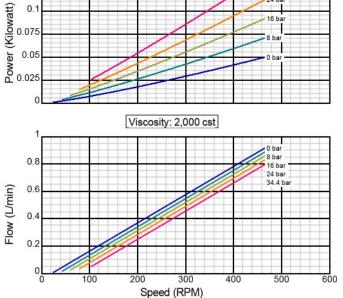



There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model 0L

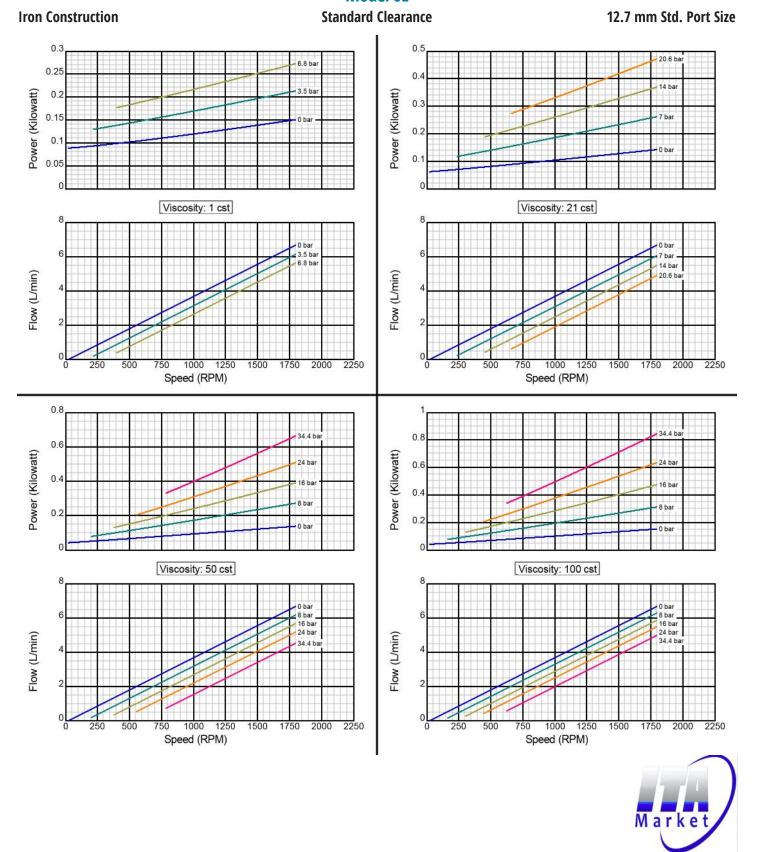


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000

MASTER DISTRIBUIDOR

Model 0L



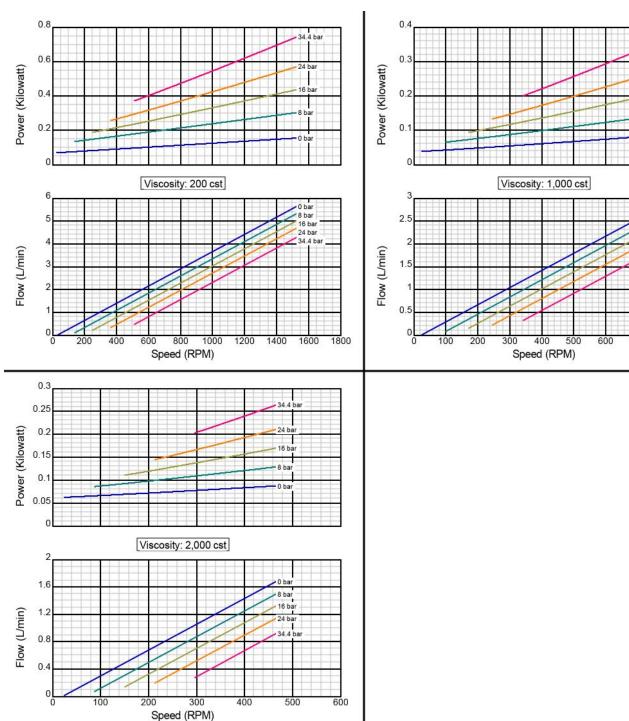




0 bar

24 bar

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model 1L

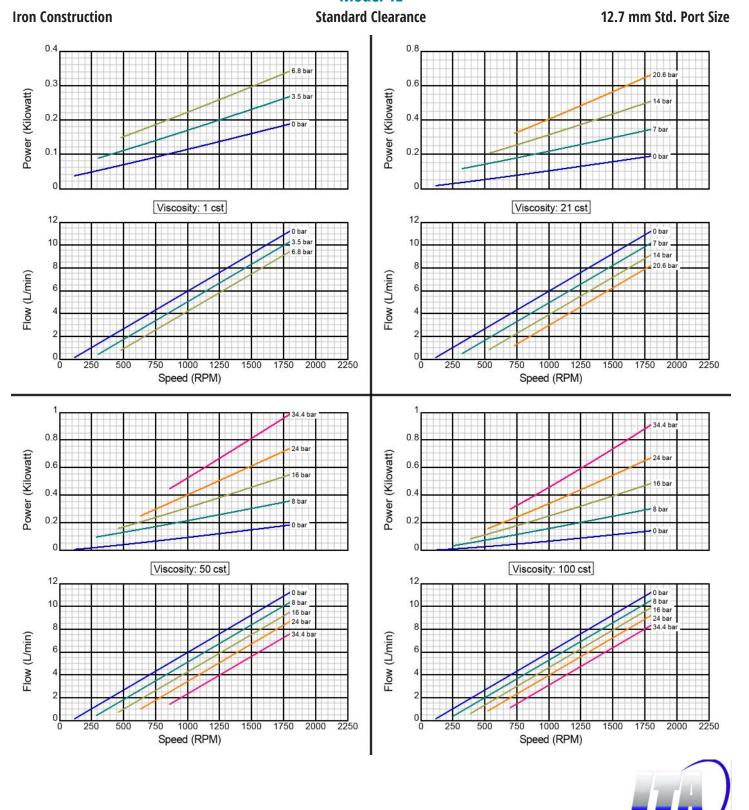

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Market

MASTER DISTRIBUIDOR

Model 1L


Iron Construction Standard Clearance 12.7 mm Std. Port Size

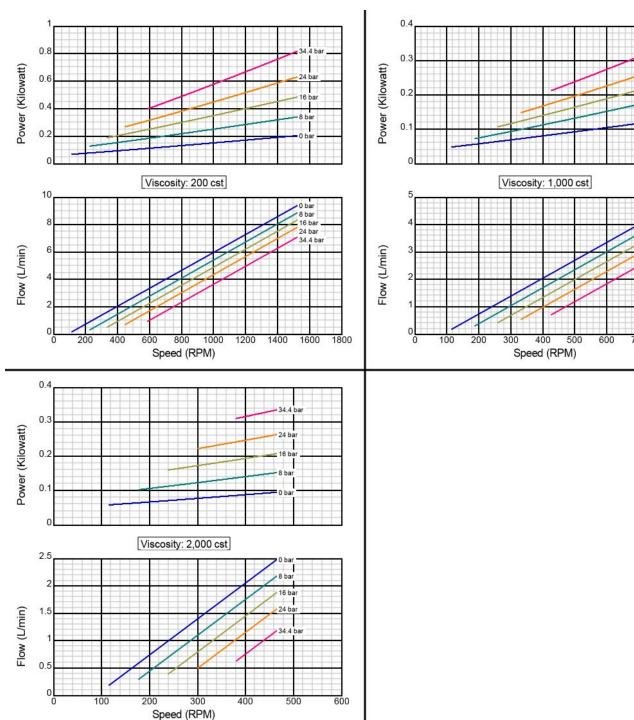



There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model 2L

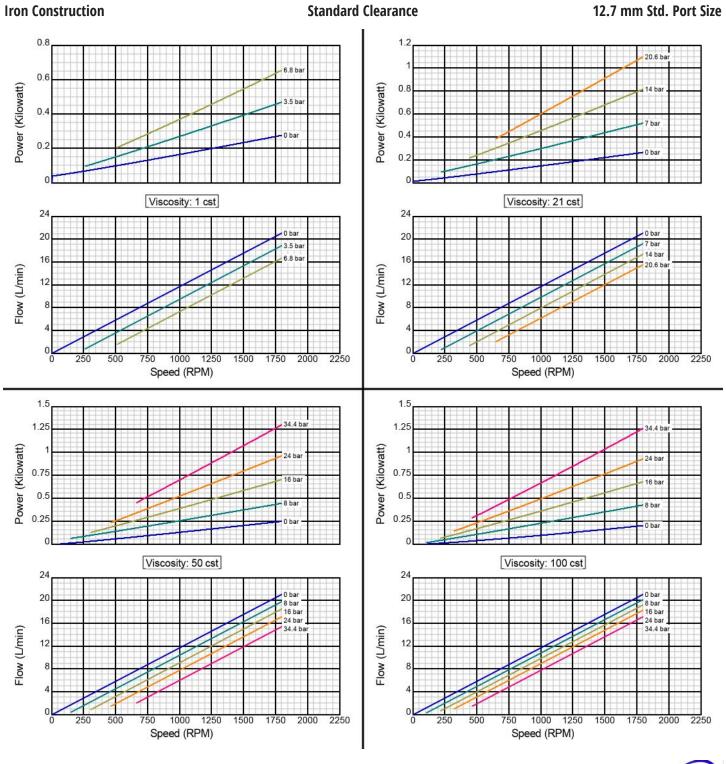




There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model 2L




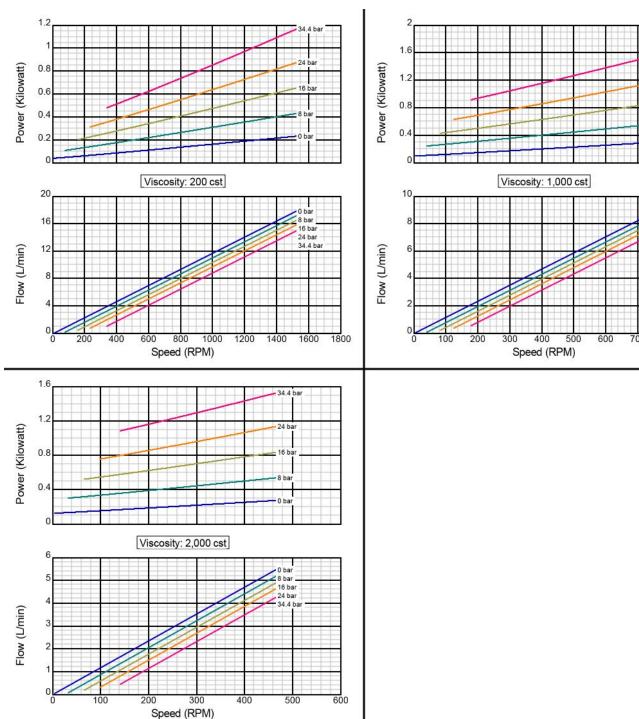



16 bar 24 bar 34.4 bar

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

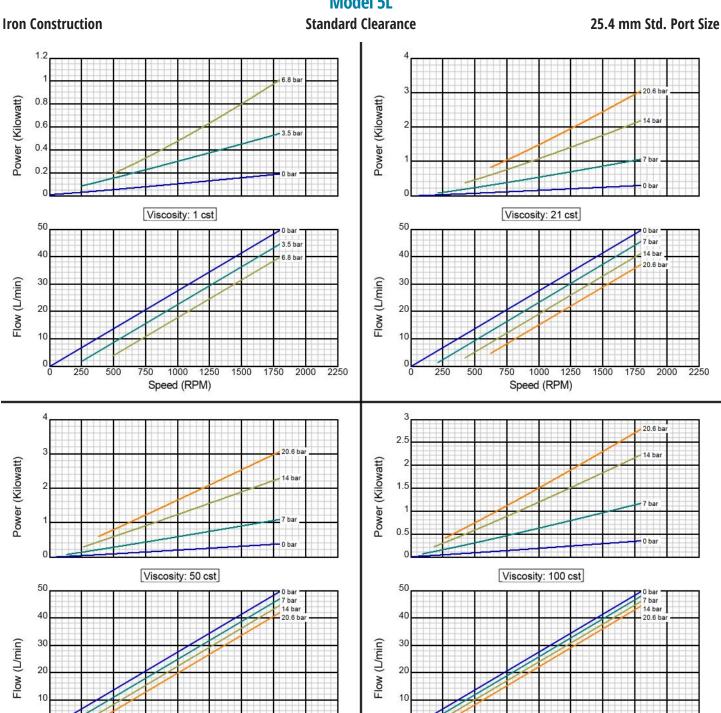



2000

1500

1000

Speed (RPM)

1750

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

1500

Speed (RPM)


1750

2000

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

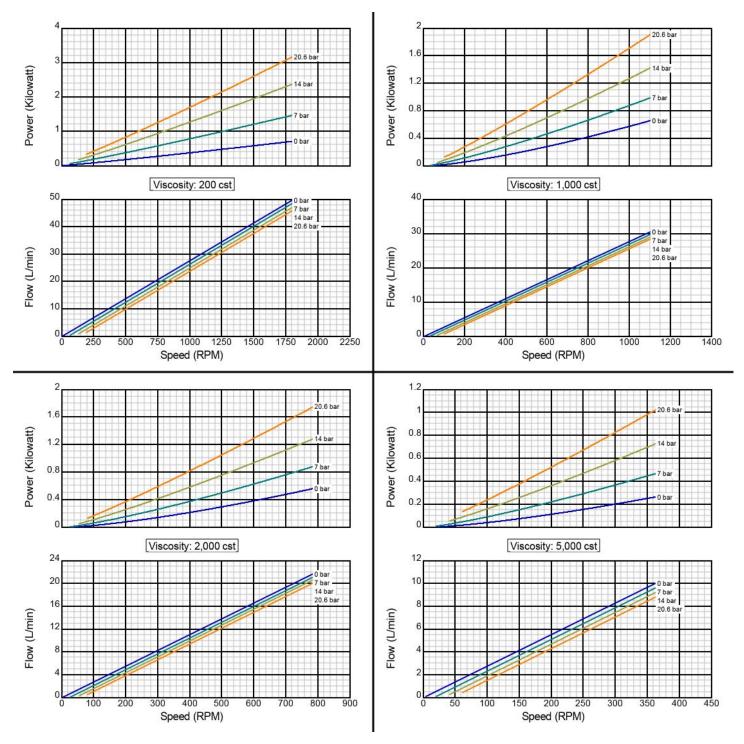

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

