

TELECRANE F21-E1/4/2



Mobile lift



Tow truck



Cranes



Winch for jeep

F21 Series Radio Controls

F21-2S / 2D / 4S / 4SB / 4D / E1 / E1B

Useable in a vast array of INDUSTRIAL EQUIPMENT

*Water-proof and Dust-proof meets IP 65 standard

*Durable casing made of Fiber Reinforced Nylon

*Superior operating temperature range -35°C~+80°C

*Very low power consumption design using only 2 AA Size

Alkaline batteries with 4 months average battery life

*Integrates Hamming Code, Self-diagnosis and 4.3 billion ID Codes

*Easy programming via WIN95/98/2000/NT

*Operating distance up to 50 ~ 100 meters (depending on model)



Model: F21-4SB (4-button w/single speed)
Size: 164x75x46 mm
Weight: about 376 g (w/batteries)



Model: F21-4S (4-button w/single speed)
F21-4D (4-button w/double speed)
Size: 156x61x51 mm
Weight: about 320 g (w/batteries)




Model: F21-E1B (6-button w/single speed)
Size: 164x75x46 mm
Weight: about 380 g (w/batteries)

Model: F21-2S (2-button w/single speed)
F21-2D (2-button w/double speed)
Size: 130x45x22 mm
Weight: about 126 g (w/batteries)



Truck tail

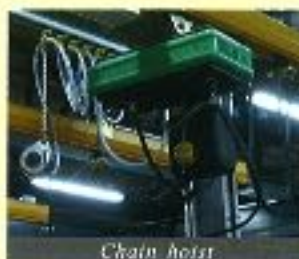


Chain hoist



Gate



Conveyor

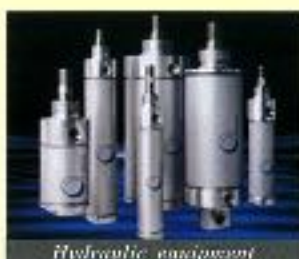

Hydraulic equipment



PLC Human-machine Interface

F21 Series PC program window

F21-E1/E1B



F21-E1/E1B Receiver
Weight: 550g (with cable)
Size: 185x85x35mm

Quad-CD-ROM & interface cable



Opt99 Copier



F21-4S/4D/4SB



F21-2S/2D


F21-2S Wire Diagram



F21-4D Wire Diagram



F21-4S/4SB/2D Wire Diagram

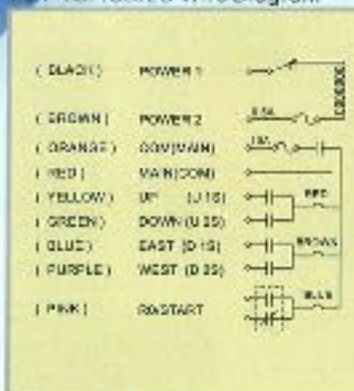

F21-E1/E1B Wire Diagram



Model: F21- 4 D - 1

Purchasing
Information

- 0 DC 12-24V
- 1 AC 48/220V 50/60Hz
- 2 AC 110/220V 50/60Hz
- 3 AC 220/380V 50/60Hz
- 4 AC 48/110V 50/60Hz
- 5 AC 24/48V 50/60Hz

- D Double speed
- S Single speed

- 2 2 button
- 4 4 button

F21-4SB- 4 4-button w/single speed, AC 48/110V 50/60Hz

F21-E1- 2 6-button w/single speed, AC 110/220V 50/60Hz

F21-E1B- 0 6-button w/single speed, DC 12-24V

MASTER DISTRIBUIDOR

