

CHECK MOISTURE TRAP MOD. BPR – BPS

VALVOLA DI SICUREZZA DI TROPPO PIENO/

SOUPAPE DE SECURITÉ DE TROP-PLEIN/ÜBERLAUFSICHERHEITSVENTIL




FEATURES

- WORKING CONDITIONS: PRESSURE = 1.5 bar (22 psi)
TEMPERATURE = -15°C / +80°C
- GALVANIZED STEEL BODY
- CONTROL SIGHT GLASS IN CASE OF FLUID INPUT
- DISCHARGE VALVE ON REQUEST
- VACUUM PRESSURE GAUGE ON REQUEST
- REVOLVING ELBOW
- TWO BALL FOR FOAM STOPPING

CARATTERISTICHE

- CONDIZIONI DI ESERCIZIO: PRESSIONE = 1.5 bar (22 psi)
TEMPERATURA = -15°C / +80°C
- CORPO IN ACCIAIO ZINCATO A CALDO
- SPIA DI CONTROLLO IN CASO DI INGRESSO LIQUIDO
- RUBINETTO DI SCARICO A RICHIESTA
- MANOVUOTOMETRO A RICHIESTA
- CURVA ORIENTABILE
- DOPPIA SFERA PER LIMITARE IL PASSAGGIO DI SCHIUMA

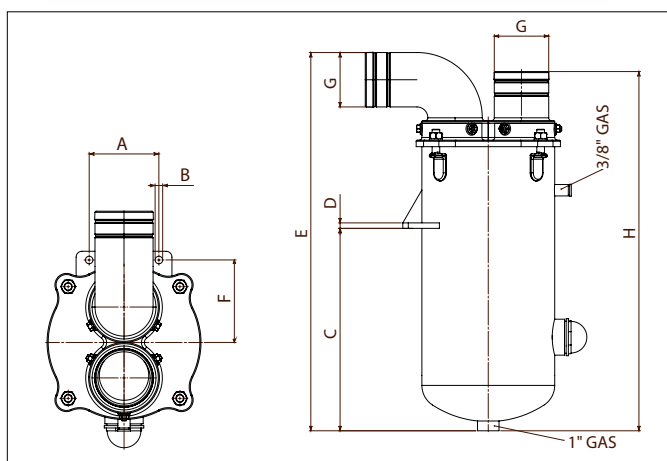

Code	Model	A	B	C	D	E	F	G	l/min	H	Kg	Article
6100200021	BPR	120	13	372	10	695	205	Ø 80	5000-11000	660	35.6	213/D
6100200022	BPS	120	13	372	10	685	205	Ø 100	11000-14000	660	36	213/E
5040200014	EXHAUST VALVE Ø 1" GAS / RUBINETTO DI SCARICO Ø 1" GAS										0.4	320
5101700007	VACUUM PRESSURE GAUGE Ø 80 - 3/8" GAS / MANOVUOTOMETRO Ø 80 CON ATTACCO DA 3/8" GAS										0.3	901/DA