

OVERFLOW VALVE MOD. BPT - BPU

VALVOLA DI TROPPO PIENO/SOUPAPE DE TROP-PLEIN /ÜBERLAUFSICHERHEITSVENTIL




FEATURES

- WORKING CONDITIONS: PRESSURE = 1.5 bar (22 psi)
TEMPERATURE = -15°C / +80°C
- IRON RING TO BE WELDED BUILT
- VACUUM PRESSURE GAUGE ON REQUEST
- AIRFLOW RANGE: 5000-18000 l/min
- DOUBLE BALL FOAM TO REDUCE THE TRANSITION

CARATTERISTICHE

- CONDIZIONI DI ESERCIZIO: PRESSIONE = 1.5 bar (22 psi)
TEMPERATURA = -15°C / +80°C
- GHIERA IN FERRO DA SALDARE INCORPORATA
- MANOVUOTOMETRO A RICHIESTA
- PORTATA DA 5000-18000 l/min
- DOPPIA SFERA PER LIMITARE IL PASSAGGIO SCHIUMA

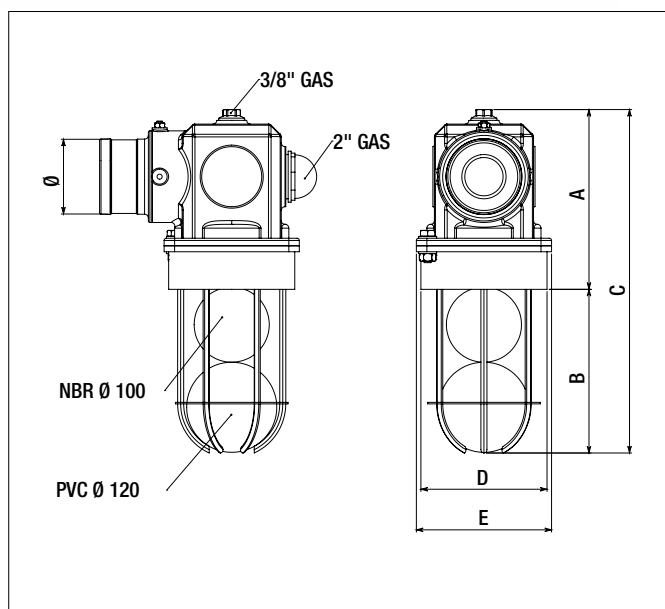

Code	Model	Ø	l/min	A	B	C	D	E	Kg	Article
6100200025	BPT	80	5000-11000	240	220	460	168	180	13.9	217/D
6100200026	BPU	100	11000-18000	240	220	460	168	180	14	217/E
5101700002	VACUUM PRESSURE GAUGE ø 80 - 3/8" GAS / MANOVUOTOMETRO ø 80 CON ATTACCO DA 3/8" GAS								0.3	901/D