



TECHNICAL DATA SHEET

Item

AWX103

Revision no.:

Filter media:

Filter area: **cm²** **Sq. inch**

Efficiency: **µm (c) at β=** **in accordance to ISO 16889**

µm (c) at β= **in accordance to ISO 16889**

Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar **gr. ISO MTD**

Collapse pressure in accordance to ISO 2941: **Bar.** **Psi.**

Max working pressure as per NFPA T2.6.1: **Bar.** **Psi.**

Burst pressure as per NFPA T2.6.1: **Bar.** **Psi.**

Water removal: **Litres** **US gallon.**

By-pass valve: **By-pass setting:** **Bar.** **Psi.**


Operating temperature: **min** **°C** **max** **°C**

Flow: **Seal:**

Fluid compatibility :

Notes :

Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm³ density mineral oil.

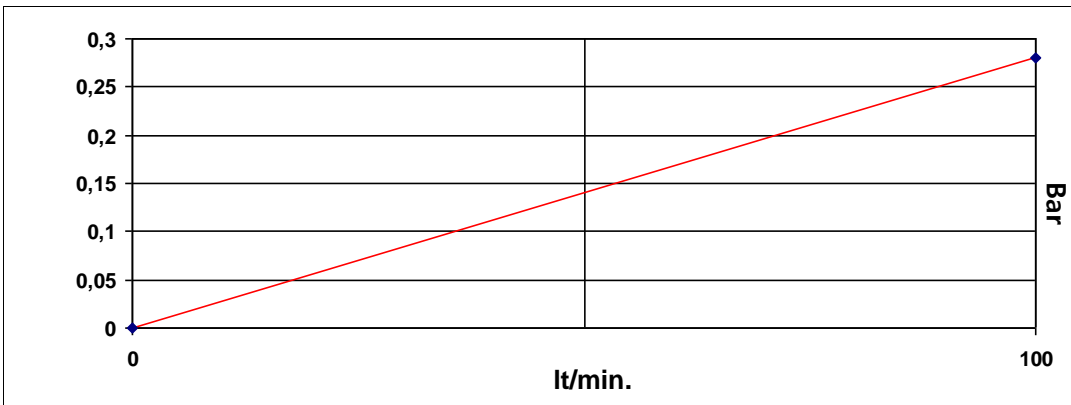


Q: **lt/min.**

Dp: **Bar.**

Q: **GPM**

Dp: **PSI**

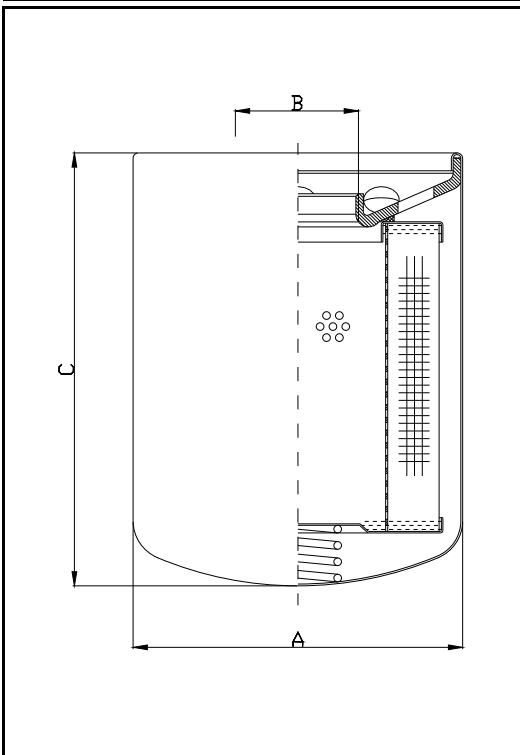

- mm**
- A**
 - B**
 - C**
 - D**
 - E**
 - F**

- inch**
- A**
 - B**
 - C**
 - D**
 - E**
 - F**



Technical drawing not in scale

Image is only representative